

(19)



(11)

**EP 1 702 466 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**13.08.2008 Bulletin 2008/33**

(51) Int Cl.:  
**H04N 7/16<sup>(2006.01)</sup> H04N 5/00<sup>(2006.01)</sup>**

(21) Application number: **04801536.6**

(86) International application number:  
**PCT/IB2004/052755**

(22) Date of filing: **10.12.2004**

(87) International publication number:  
**WO 2005/067295 (21.07.2005 Gazette 2005/29)**

### (54) **METHOD AND APPARATUS FOR CONTENT RECOMMENDATION**

VERFAHREN UND VORRICHTUNG ZUR INHALTSEMPFEHLUNG

PROCEDE ET APPAREIL PERMETTANT DE RECOMMANDER DU CONTENU

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **29.12.2003 CN 200310124523**

(43) Date of publication of application:  
**20.09.2006 Bulletin 2006/38**

(73) Proprietor: **Koninklijke Philips Electronics N.V.  
5621 BA Eindhoven (NL)**

(72) Inventor: **MOREL, Anthony,  
Philips Electronics China  
Shanghai 200070 (CN)**

(74) Representative: **Wood, Graham et al  
Bailey Walsh & Co  
5 York Place  
Leeds LS1 2SD (GB)**

(56) References cited:  
**EP-A- 0 742 669 WO-A-02/11445  
WO-A-02/42959 WO-A-02/47381  
GB-A- 2 387 676 US-A1- 2003 051 240  
US-A1- 2003 237 087**

- ZHOU XINGHE ET AL: "A multi-agent system for personalized and private service in PDR" INFORMATION TECHNOLOGY: CODING AND COMPUTING [COMPUTERS AND COMMUNICATIONS], 2003. PROCEEDINGS. ITCC 2003. INTERNATIONAL CONFERENCE ON APRIL 28-30, 2003, PISCATAWAY, NJ, USA, IEEE, 28 April 2003 (2003-04-28), pages 635-639, XP010638694 ISBN: 0-7695-1916-4

- TV-ANYTIME: "Specification Series : S-3 - Metadata - SP003v1.1" SPECS, 17 August 2001 (2001-08-17), XP002205700
- EVAIN J-P: "TV-Anytime A preliminary specification on schedule!" EBU REVIEW TECHNICAL, EUROPEAN BROADCASTING UNION, GENEVA, CH, September 2000 (2000-09), pages 1-14, XP002279571 ISSN: 1018-7391
- YU Z ET AL: "TV3P: AN ADAPTIVE ASSISTANT FOR PERSONALIZED TV" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, IEEE INC. NEW YORK, US, vol. 50, no. 1, February 2004 (2004-02), pages 393-399, XP001198155 ISSN: 0098-3063
- KAUSHAL KURAPATI ET AL: "A Multi-Agent TV Recommender" WORKSHOP ON PERSONALIZATION IN FUTURE TV, XX, XX, 13 July 2001 (2001-07-13), pages 1-8, XP002228385
- EHRMANTRAUT M ET AL: "THE PERSONAL ELECTRONIC PROGRAM GUIDE - TOWARDS THE PRE-SELECTION OF INDIVIDUAL TV PROGRAMS" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON INFORMATION AND KNOWLEDGE MANAGEMENT CIKM, ACM, NEW YORK, NY, US, 12 November 1996 (1996-11-12), pages 243-250, XP002071337
- COTTER P ET AL: "PTV: INTELLIGENT PERSONALISED TV GUIDES" PROCEEDINGS OF THE NATIONAL CONFERENCE ON ARTIFICIAL INTELLIGENCE AND THE INNOVATIVE APPLICATIONS OF ARTIFICIAL INTELLIGENCE CONFERENCE, XX, XX, 30 July 2000 (2000-07-30), pages 957-964, XP008020497

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 702 466 B1**

## Description

## Background Art

**[0001]** The present invention relates to a method and apparatus for content recommendation, and particularly relates to a method and apparatus for recommending content cautiously.

**[0002]** With the development of modern communication technology, people can acquire a large amount of information at any moment. When people face too much information for selection, they are in urgent need of a tool that can help them to rapidly find a content, in which they are really interested, i.e. a personalized content recommendation system. At present, various kinds of content recommendation systems have already been applied to television, broadcast and Internet field extensively.

**[0003]** Fig. 1 is a block diagram of a system for recommending content in the prior art, the system comprising: an information receiving means 160 for receiving information; a user profile storage means 110 for storing the user's favor characteristics; a matching means 120 for comparing the user's favor characteristics with the received information to calculate and obtain the degree of user's interest in the information, the degree of interest is a numerical value; a sieving means 130 for selecting the information in which the user is interested based on the calculated degree of interest and recommending the information to the user; a user interactive means 140 for interchanging information between the user and the recommendation system, the user may select the recommended information by means of the interactive means for viewing, skip the information that does not require for viewing and give other feedback to alter his/her own user profile; and a user profile modifying means 150 for updating the user profile according to the user's feedback information.

**[0004]** However, the current recommendation method has some disadvantages. If a user has a definite request for a gay movie, the corresponding user profile will be updated. After that, the recommendation system will always recommend to the user too many gay movies and bring a big trouble to the user.

**[0005]** In order to get rid of the unnecessary troubles mentioned above, the user may alter recommendation by requesting to view other programs, for example, war movies. However, a problem that the recommendation system will recommend too many programs of war movies arises immediately.

**[0006]** For example, according to the report of Wall Street magazine, the recommendation system of a user always recommends to him the programs about gay, as a try he uses war movies to alter recommendation made by the recommendation system, unfortunately the recommendation system asserts that he is a crazy guy about reminiscing the Third Reich and keeps on recommending to him the movies about the Third Reich.

**[0007]** Thus, it can be seen that an error of content recommendation brings the user a lot of trouble, especially in the case of recommending the programs related to sensitive contents like violence, sex, and so on. Therefore, a more cautious and accurate recommendation system is needed.

## Contents of the Invention

**[0008]** One of the objects of the invention is to set forth a new method for recommending content in order to overcome the defects existing in the prior recommendation system mentioned above and recommend some sensitive contents to the user more cautiously and accurately, the method comprising: first, receiving content information which includes particular information characteristic, the information characteristic including the content characteristic and the program specific information, wherein the program specific information could be the key word in synopsis; next, matching the content information with a user profile; then, performing a corresponding content alert processing on the matched result according to the information characteristic; and finally, recommending corresponding information to the user according to the result that is obtained after content alert processing.

**[0009]** Below is the procedure of the content alert processing: obtaining corresponding alert characteristic from the information characteristic; obtaining a comprehensive alert level of the content information according to the alert characteristic; and processing the matched result correspondingly according to the comprehensive alert level, wherein the alert characteristic including at least one of the followings: age, sex, violence, vulgarity, discrimination and drug.

**[0010]** The comprehensive alert level is obtained in this way: first, obtaining the parameter of the alert characteristic; comparing the parameter with a corresponding predetermined threshold to obtain the corresponding alert level; then processing the alert level to obtain the comprehensive alert level.

**[0011]** Since the present recommendation method adds a step of content alert processing after matching the content information with the user profile and before recommending the program, this method is more cautious to the recommendation of sensitive content and avoids recommending those contents that are not expected by the user.

**[0012]** Another object of the invention is to set forth a new method for updating the user profile in order to get rid of the defects in the recommendation system mentioned above and recommend to the user some sensitive contents more cautiously and accurately. The method comprising: first, obtaining information characteristic of content information and obtaining feedback information of the content information from the user, performing corresponding content alert process-

ing on the feedback information according to the information characteristic; and updating the user profile according to the processed feedback information.

**[0013]** During the procedure of updating the user profile, corresponding content alert processing on the feedback information is performed before the feedback information is used to update the user profile, so that the feedback information can reflect the user's requirement more cautiously. This recommendation system will not bring unnecessary influence to the user profile and then recommend to the user the unfavorable contents due to the user's occasional behavior.

With reference to the following description made in combination with drawings and the claims, other objects and achievements of the invention will be obvious and a more comprehensive understanding of the invention can be obtained.

#### Description of Figures

**[0014]** With reference to the drawings, the present invention gives detailed explanation through embodiments, wherein:

Fig. 1 is a structural diagram of the prior content recommendation system;

Fig. 2 is a structural diagram of the content recommendation system according an embodiment of the invention;

Fig. 3 is a flow chart of the content recommendation method according an embodiment of the invention;

Fig. 4 is a flow chart of content alert processing according to an embodiment of the invention;

Fig. 5 is a structural diagram of a user profile update system according to another embodiment of the invention; and

Fig. 6 is a flow chart of the user profile updating method according to another embodiment of the invention.

**[0015]** In all the drawings, the same reference numerals represents the similar or same feature and function. With reference to the drawings, further explanation of the invention is made as follows in combination with the embodiments.

#### Mode of Carrying Out the Invention

**[0016]** Fig. 2 is a structural diagram of the content recommendation system according an example of the invention. This recommendation system includes an information receiving means 160, a matching means 120, a content alert processing means 280 and a sieving means 130.

**[0017]** The information receiving means 160 is used for receiving information from outside, the information comes from broadcast, television station or Internet, etc., for example, a digital television electronic program guide. The information comprises specific information characteristics consisting of content characteristics and program specific information. The program specific information can be the key words in the program synopsis.

**[0018]** The matching means 120 is used for matching the content information with a user profile to obtain a matching result. Specifically, a similarity match is performed between the specific information characteristics of the content information and the favor characteristics in the user profile to obtain the user's comprehensive interest degree of the specific information characteristics.

**[0019]** The content alert processing means 280 is used for performing corresponding content alert processing to the matching result according to the information characteristics, the means comprising: an alert characteristic obtaining means 282 for obtaining corresponding alert characteristics from the information characteristics; a comprehensive alert level obtaining means 284 for obtaining a comprehensive alert level of the content information according to the alert characteristic; and an information processing means 286 for correspondingly processing the matching result according to the comprehensive alert level.

**[0020]** The sieving means 130 is used for recommending to the user the information having been undergone with the content alert processing. The sieving means 130 sieves, through a set threshold value, the information in which the user is interested from the information that have been undergone with content alert processing, arranges the sieved information in order according to the interest degree and then generates a recommendation list for the user.

**[0021]** The content recommendation system further includes a user profile storage means 110 for storing the user's favor characteristics.

**[0022]** The content recommendation system further includes a user interactive means 140 for interchanging information between the user and the recommendation system, the user may select the recommendation information for viewing by means of the interactive means, skip the information in which the user is not interested and give other feedback information to update the user profile.

**[0023]** The content recommendation system further includes a user profile modifying means 150 for dynamically updating the user profile according to the user's feedback information. For example, the actual user's interest degree of the recommendation information is determined according to a ratio between the time on which the user views the recommendation information and the predetermined time required for playing the information, thereby updating user parameters.

**[0024]** Fig. 3 is a flow chart of the content recommendation method according to an embodiment of the invention.

**[0025]** First, the content information is received (step S300). For example, the content information is a metadata of a television program from digital television program guide, the metadata contains a lot of specific information characteristics, for example, type, language, actor, keyword ... , a program can be represented as a vector formed by n items of specific information characteristics, that is

$$C = (u_1, \dots, u_n) \quad (1)$$

wherein  $u_i$  is the weighted value of specific information characteristic "term"  $t_i$ , the weighted value is taken following such a rule: if "term"  $t_i$  belongs to key information of the program metadata, then  $u_i=1$ , otherwise  $u_i=0$ . Supposing the metadata of a movie "Silent Lamb" is received, and this movie has four information characteristics which are "movie", "war", "violence" and "sex" respectively. Since "movie", "violence" and "sex" are key information of the program metadata, their weighted value is 1, and "war" is not the key information of the program metadata, its weighted value is 0, this program can be represented as  $C=(1, 0, 1, 1,)$

**[0026]** Then, a similarity matching is performed between the content information and the user profile, thereby obtaining the user's comprehensive interest degree of the program (step S320). A user profile may consist of m different user favor characteristics "term", the favor characteristic can be defined as a triplet ("term", weighted value, priority level), and then the profile can be represented as:

$$P=((t_1, w_1, 1), (t_2, w_2, 2), \dots, (t_m, w_m, m)) \quad (2)$$

$$w_i \geq w_{i+1} \quad (1 \leq i \leq m)$$

wherein  $t_i$  is a favor characteristic "term",  $w_i$  is a weighted value of "term"  $t_i$ ,  $i$  is a priority level of  $t_i$  in the profile. The weighted value and the priority level represent the degree of relatively importance of the "term" in the profile, for example, a user profile P has the following user favor characteristics:

$$P=((\text{movie}, 2.41, 1), (\text{war}, 1.80, 2), (\text{violence}, 1.44, 3), (\text{sex}, 1.28, 4), (\text{love}, 1.12, 5))$$

**[0027]** For simplifying calculation, we take n "term" that best represents the user's favor to construct the profiles, that is, taking n "term" with the maximum weighted value to construct profiles, then profile P may be represented by the following vector:

$$P = (w_1, \dots, w_n) \quad (3)$$

wherein  $w_i$  is a weighted value of "term"  $t_i$  in the profile. Supposing  $n=4$ , then profile P can be represented as:

$$p=(2.41, 1.80, 1.44, 1.28)$$

**[0028]** According to the traditional concept of a vector space, the similarity between the program information vector and the user favor vector refers to correlation between them. We can measure the degree of similarity by the weighted value between the corresponding "terms". Usually we take the cosine value of an angle between two vectors as a

standard of measurement. Setting program information vector  $C = (u_1, \dots, u_n)$  and the user profile vector  $P = (w_1, \dots, w_n)$ , the similarity between them can be obtained from the following equation:

$$sim(C, P) = \frac{C \times P}{\|C\| \|P\|} = \frac{\sum_{i=1}^n u_i w_i}{\sqrt{\sum_{i=1}^n u_i^2 \sum_{i=1}^n w_i^2}} \quad (4)$$

**[0029]** If program information vector  $C=(1, 0, 1, 1)$ , favor profile vector  $P=(2.41, 1.80, 1.44, 1.28)$ , then the similarity between them, i.e. the user's comprehensive degree of interest of the program is:

$$sim(C, P) = \frac{2.41 \times 1 + 1.44 \times 1 + 1.28 \times 1}{\sqrt{(2.41^2 + 1.80^2 + 1.44^2 + 1.28^2)(1^2 + 1^2 + 1^2)}} = 0.83 \quad (5)$$

**[0030]** After that, corresponding content alert processing is performed based on the above matching result (step S340). This step is to weight the comprehensive degree of interest by the comprehensive alert level  $\gamma$ , so that the comprehensive degree of interest can reflect more accurately the degree of how much the user is interested in the program. Supposing a comprehensive alert level  $\gamma=0.6$ , after being weighted, the comprehensive alert level

$$\gamma = 0.83 \times 0.6 = 0.498$$

**[0031]** Thus, the degree of the user's comprehensive degree of interest in the program is reduced after it is weighted by content alert. Details about how to employ comprehensive alert level to weight the comprehensive degree of interest will be given in the following text in conjunction with Fig. 4.

**[0032]** Next, the information that has been undergone with content alert processing is recommended to the user (step S360). A threshold value is set, and the program in which the user is interested is sieved via the threshold value. If the degree of the user's comprehensive interest in a certain program is greater than the threshold value, it is deemed that the user is interested in this program and the program will be selected. The greater the comprehensive degree of interest in the program is, the more interested the user is in the program. Then, an ordering is made according to the degree of interest in the program, thereby forming a recommendation list to recommend a program to the user.

**[0033]** Supposing the threshold value=0.6, since in step 340 the obtained comprehensive alert degree of interest  $0.498 < 0.6$ , so the movie "Silent Lamb" that is meant to be recommended to the user will no longer be recommended to the user after alert processing.

**[0034]** The user's feedback information is received (step S380). The feedback information can be the time on which the user views the recommended content or other information that reflect the degree of the user's favor in the recommended program. The content of the feedback information can also be provided through viewing, deleting and skipping the recommended program by the user.

**[0035]** Finally, a user profile is updated according to the user's feedback information (step S390). The updating includes updating the favor characteristic "term" and its weighted value and priority level. As for the "term" contained in those files, their weighted values are modified based on the feedback result, according to equations (6) and (7):

$$w_i' = w_i + \beta \times f(i) \quad (6)$$

$$\beta = \frac{T_r}{T_t} \in [0, 1] \quad (7)$$

wherein  $w_i'$  is a weighted value of "term"  $t_i$  after the modification from the feedback;

$w_i$  is a weighted value of "term"  $t_i$  before feedback;

$\beta$  is a ratio between the time ( $T_r$ ) on which the user watches the program and the

time ( $T_t$ ) of the program itself.  $\beta$  can be regarded as the degree of the user's interest in the recommended program.

$f(i)$  is a reciprocal of the priority level of "term"  $t_i$  in the profile, for example, if the priority level of  $t_i$  is 4, then  $f(i) = f(4) = 0.25$ ,  $f(i)$  reflects the historical record of user's viewing.

**[0036]** As for those "term" not included in the profile, the processing mode is as follows:

First, calculating the weighted value of the "term",

$$w_i = \beta \times f(i) \quad (8)$$

wherein,  $w_i$  is a weighted value of new "term"  $t_i$ ; the meaning of  $\beta$  is ditto.

**[0037]** Since "term"  $t_i$  is not included in the profile,  $f(i)$  cannot be calculated according to the above method, but it can

be defined as a default value  $\varepsilon$  (for example,  $\frac{1}{50} = 0.02$ ))

**[0038]** Next, if  $w_i$  that is obtained after calculation is greater than the preset threshold value  $\lambda$  (e.g. 0.01), we will add the "term" to the favor information in the user profile, otherwise ignore it.

**[0039]** Now a simple example is made: a program "Gone with the Wind" is recommended to the user. This program takes 180 minutes and contains a large number of "keywords", one of which is "marriage", the user changes the program after viewing 160 minutes, then the weighted value ( $W_{\text{Marriage}} = 1.44$ ) of the corresponding favor characteristic "marriage" in the profile is modified as:

$$W'_{\text{Marriage}} = W_{\text{Marriage}} + \beta \times f(3) = 1.44 + 1 \times \frac{160}{180} \times \frac{1}{3} = 1.74$$

**[0040]** Fig. 4 is a flow chart of content alert processing according to an embodiment of the invention.

**[0041]** First, corresponding alert characteristic is obtained from the information characteristic (step S420). The alert characteristic can be age, for example, MPAA classifies the movie and television programs by using an age index: G (general level), PG (viewing with parents guide as suggested), PG-13 (viewing with parents guide for children under 13 years old as suggested), R (restricted for viewing with adults guide), NG-17 (Children of 17 years old or less cannot view).

**[0042]** Also the alert characteristics can be other evaluable classification of alerts, for example, the following categories that are defined by TV-Anytime:

Sex (no, implied, revealed, adult restricted, violence);

Violence applied to human being (no, mild, strong, kill);

Violence applied to animals (no, mild, kill);

Violence applied to fictitious characters (no, mild, kill);

Vulgarity (no, occasional curse, frequency curse, occasionally severe curse, frequently severe curse);

Discrimination (no, on purpose);

Drug (no, description of usage, instructive details)

**[0043]** The above alert characteristics can be provided by a prior Genre Alert Spotting. The Genre Alert Spotting will obtain corresponding alert characteristics from the program content characteristics.

**[0044]** For example, the above description mentions that the metadata of the received program "Silent Lamb". This program has four information characteristics. When comparing with the preset alert characteristics, "violence" and "individuality" among them are alert characteristics.

[0045] Next, these alert features are mapped into parameters, for example, with values between 0 and 1 (step 440). For example, the violence (no, mild, strong, kill) exerted to human beings can be mapped into L1 (0, 0.3, 0.6, 1); sex (no, implied, revealed, restricted for adults, violence) can be mapped into L2=(0, 0.25, 0.5, 0.75, 1); age (G, PG, PG-13, R, NC-17) can be mapped into L3=(0, 0.25, 0.5, 0.75, 1) and so on.

[0046] Then, according to the above rule, the parameters of the alert characteristics of the movie "Silent Lamb" can be obtained:

L1=0.5, L2=0.6

[0047] Next, the above parameters are compared with corresponding threshold value respectively to obtain corresponding alert levels (step S460). If the parameters of the alert characteristics are greater than corresponding threshold value, an alert is triggered. Supposing the predetermined threshold value to which such an alert characteristic as sex corresponds T1=0.3, then an alert is triggered when L1>0.3. That is to say, sex (revealed) corresponding L1=0.5>0.3, an alert is triggered. Supposing the predetermined threshold value to which such an alert characteristic as violence (strong) corresponds T1=0.4, when L2=0.6>0.4, an alert will also be triggered to give a corresponding alert level.

[0048] The alert level can be obtained in this way: if  $L1 \leq T1$  the output value is 0, indicating there is no alert; otherwise an alert is triggered, the alert level is  $L1 - T1$ . Before comparing the parameter with the predetermined threshold value, sensitivity ( $s1, s2, \dots$ ) can be set for the parameter L1 of different alert characteristics (age, sex, violence, etc.). The higher the sensitivity is, the higher the value of  $L2 \times S1$  is, indicating that alert characteristics has greater influence on the recommendation. An option can be provided to make the user to adjust the sensitivity of the alert characteristics one by one, or make the user to adjust more easily the sensitivity of the alert characteristics through selecting the range of sensitivity. Hence, the alert levels triggered by the alert characteristics like "sex" and "violence" of the program are respectively as follows:

$L1 - T1 = 0.2, L2 - T2 = 0.2$

[0049] The predetermined threshold value can be determined by user, and for different alert characteristics different threshold values can be set.

[0050] Again, a comprehensive alert level is obtained according to these alert levels (step S480). An alert value is first obtained by combining all the alert levels linearly:

$$\text{Alert value} = \sum_i \max(0, L_i - T_i) \quad (9)$$

[0051] Then, the alert value is mapped between the range (0,1) as a comprehensive alert level of the program. Here, supposing 0 = content restricted, 1 = no alert, for example, mapping is made according to the following method:

$$\text{Comprehensive alert level } \gamma = 1 - \min(\text{alert value}, 1) \quad (10)$$

Whereby the alert value of "Silent Lamb" =  $\max(0, 0.2) + \max(0, 0.2) = 0.4$ ,  
Comprehensive alert level  $\gamma = 1 - \min(0.4, 1) = 0.6$

[0052] If the comprehensive alert level of the program is closer to 0, it indicates that the program contains more alert characteristics, and more restriction is required; on the contrary, if the comprehensive alert characteristic of the program is closer to 1, it indicates that the program has less alert characteristics and less restriction is required.

[0053] Finally, weighting is made according to the matching result of the program content information and the user profile by the comprehensive alert level, i.e. a comprehensive degree of interest (Step S490). In this way, the comprehensive degree of interest can better reflect the user's real interest and the recommendation system can recommend more cautiously and accurately.

[0054] Fig. 5 is a structural diagram of a user profile updating system according to another embodiment of the invention. The user profile updating system comprises user interactive means 140, content alert processing means 280 and user profile modifying means 150.

[0055] The user interactive means 140 is used for obtaining information characteristics of the content information and the user's feedback information of the content information.

[0056] The content alert processing means 280 is used for performing content alert processing on the feedback information. The means further comprises: an alert characteristic acquiring means 282 for obtaining from the information characteristics the alert characteristics to which the content information corresponds; a comprehensive alert level acquiring means 284 for obtaining comprehensive alert level according to the alert characteristics; and information process-

ing means 286 for processing the feedback information according to the comprehensive alert level.

[0057] The user profile updating means 150 is used for updating the user profile according to the feedback information that have been undergone with content alert processing.

[0058] Furthermore, the system includes an information receiving means 160, matching means 120, sieving means 130 and user profile storage means 110. The functions of these means are described in the explanation of fig.3 and will not be repeated here any more.

[0059] Fig. 6 is a flow chart of a user profile updating method according to an embodiment of the invention.

[0060] First, the content information is received (step S300).

[0061] Then, a similarity matching is performed between the content information and the user profile, thereby obtaining the user's comprehensive degree of interest of the program (step S320).

[0062] Next, the content in which the user is interested is sieved according to the degree of interest obtained after calculation and is recommended to the user (Step S640).

[0063] The user's feedback information is received (Step S660).

[0064] Corresponding content alert processing is performed on the feedback information (step S680). This step is similar to step S340, and the difference is, in step S340 the alert characteristics are program information from outside such as broadcasting, television or Internet, whereas the alert characteristics in step S680 are from the content information that is recommended to the user. In addition, in step S340, content alert weighting is performed on the matching result, whereas here content alert weighting is performed on the user's feedback information. In combination with Fig. 4, how to employ comprehensive alert levels to perform weighting has been described in detail.

[0065] Finally, the user profile is updated according to the feedback information that have been undergone with content alert processing (step S690).

The weighted value of the favor characteristic "term" included in the user profile is modified according to equations (6') and (8'):

$$w_i' \leftarrow w_i + \beta \times \gamma \times f(i) \quad (6')$$

$$w_j' = \beta \times \gamma \times f(i) \quad (8')$$

wherein  $w_i'$  is a weighted value of "term"  $t_i$  after feedback modification;  $w_i$  is a weighted value of "term"  $t_i$  before feedback;  $\beta$  is a ratio between the time ( $T_r$ ) on which the user watches the program and the time ( $T_t$ ) of the program itself.  $\beta$  can be regarded as the degree of the user's interest to the recommended program.  $f(i)$  is a reciprocal of the priority level of "term"  $t_i$  in the profile, for example, if the priority level of  $t_i$  is 4, then  $f(i) = f(4) = 0.25$ ,  $f(i)$  reflects historical record of the user's viewing.  $\gamma$  refers to comprehensive alarm level.

[0066] The example mentioned in the previous text is still used as an example. A program "Gone with the Wind" is recommended to the user, this program takes 180 minutes and has an information characteristic "marriage", however, the user changes the program after viewing 160 minutes, and the comprehensive alert level of the program  $\gamma = 0.8$ , then the weighted value ( $W_{\text{Marriage}} = 1.44$ ) of the corresponding favor characteristic "term" marriage in the profile is modified as:

$$W_{\text{Marriage}}' = W_{\text{Marriage}} + \beta \times \lambda \times f(3) = 1.44 + 1 \times 0.8 \times \frac{160}{180} \times \frac{1}{3} = 1.67$$

[0067] Through the above equation, the user's degree of favor of the characteristic "marriage" is modified. Compared with the situation without performing content alert processing, this weighted value is less, indicating that the user's degree of favor of the program will be reduced somewhat due to the presence of the alert characteristic in the program.

[0068] Above it is described that a content alert processing step is added before recommending to the user in the prior content recommendation method, or a content alert processing step is added after receiving the user's feedback information, so that the recommendation is more cautious and accurate. Certainly, the above two methods can be combined, that is, a content alert processing step is added before recommending to the user as well as after receiving the user's feedback information, so that not only the comprehensive degree of interest is much closer to the degree of user's actual interest in the program, but also the feedback information can better reflect the user's actual need and the



recommendation is more cautious and accurate.

[0069] Although the description of the invention is made in combination with the specific embodiments, it will be obvious that those skilled in the art are able to make various alternations, modifications and changes based on the statement of context. Therefore, when such alternations, modifications and changes come within the scope of the appended claims, they shall be included in the invention.

## Claims

1. A method for recommending content, comprising the steps of:

- a. receiving content information including a particular information characteristic;
- b. matching said content information with an user profile to obtain a comprehensive degree of interest;
- c. obtaining an alert characteristic from the information characteristic;
- d. determining a comprehensive alert level based on parameters of the alert characteristic;
- e. weighting the comprehensive degree of interest by the comprehensive alert level;
- f. recommending the corresponding information to the user according to the weighted comprehensive degree of interest.

2. The method according to claim 1, wherein said information characteristic comprises a content characteristic and particular program information.

3. The method according to claim 2, wherein said particular program information is a key word in synopsis.

4. The method according to claim 1, wherein said alert characteristic comprises at least one of the followings: age, sex, violence, vulgarity, discrimination and drug.

5. A method for updating user profile, comprising the steps:

- a. obtaining an information characteristic of content information;
- b. obtaining feedback information of said content information from the user;
- c. obtaining an alert characteristic from the information characteristic;
- d. determine a comprehensive alert level based on parameters of the alert characteristic;
- e. weighting the feedback information by the comprehensive alert level;
- f. updating said user profile according to the weighted feedback information.

6. The method according to claim 5, wherein said information characteristic comprises a content characteristic and particular program information.

7. The method according to claim 6, wherein the particular program information is a key word in synopsis.

8. The method according to claim 5, wherein said alert characteristic comprises at least one of the followings: age, sex, violence, vulgarity, discrimination and drug.

9. An apparatus for recommending content, comprising:

- an information receiving means for receiving content information which comprises particular information characteristic;
- a matching means for matching said content information with a user profile to obtain a comprehensive degree of interest;
- a content-alert processing means for obtaining an alert characteristic from the information characteristic, determining a comprehensive alert level based on parameters of the alert characteristic and weighting the comprehensive degree of interest by the comprehensive alert level; and
- a sieving means for recommending the corresponding information to user according to the weighted comprehensive degree of interest.

10. An apparatus for updating user profile, comprises:

an user communicating means for obtaining information characteristic of a piece of content information and obtaining feedback information of said content information from the user;  
a content-alert processing means for obtaining an alert characteristic from the information characteristic, determining a comprehensive alert level based on parameters of the alert characteristic and weighting the feedback information by the comprehensive alert level; and  
an user profile updating means for updating said user profile according to the weighted feedback information.

## Patentansprüche

1. Verfahren zum Empfehlen von Inhalt, das die folgenden Schritte beinhaltet:
  - a) Empfangen von Inhaltsinformationen mit einer bestimmten Informationscharakteristik;
  - b) Vergleichen der genannten Inhaltsinformationen mit einem Benutzerprofil, um einen umfassenden Interessensgrad zu erhalten;
  - c) Einholen einer Alarmcharakteristik von der Informationscharakteristik;
  - d) Ermitteln einer umfassenden Alarmstufe auf der Basis von Parametern der Alarmcharakteristik;
  - e) Gewichten des umfassenden Interessensgrades anhand der umfassenden Alarmstufe;
  - f) Empfehlen der entsprechenden Informationen dem Benutzer gemäß dem gewichteten umfassenden Interessensgrad.
2. Verfahren nach Anspruch 1, wobei die genannte Informationscharakteristik eine Inhaltscharakteristik und bestimmte Programminformationen umfasst.
3. Verfahren nach Anspruch 2, wobei die genannten Programminformationen ein Schlüsselwort in Synopse sind.
4. Verfahren nach Anspruch 1, wobei die genannte Alarmcharakteristik wenigstens eines der Folgenden umfasst: Alter, Sex, Gewalt, Vulgarität, Diskriminierung und Drogen.
5. Verfahren zum Aktualisieren eines Benutzerprofils, das die folgenden Schritte beinhaltet:
  - a) Einholen einer Informationscharakteristik von Inhaltsinformationen;
  - b) Einholen von Feedbackinformationen über die genannten Inhaltsinformationen vom Benutzer;
  - c) Einholen einer Alarmcharakteristik von der Informationscharakteristik;
  - d) Ermitteln einer umfassenden Alarmstufe auf der Basis von Parametern der Alarmcharakteristik;
  - e) Gewichten der Feedbackinformationen anhand der umfassenden Alarmstufe;
  - f) Aktualisieren des genannten Benutzerprofils gemäß den gewichteten Feedbackinformationen.
6. Verfahren nach Anspruch 5, wobei die genannte Informationscharakteristik eine Inhaltscharakteristik und bestimmte Programminformationen umfasst.
7. Verfahren nach Anspruch 6, wobei die bestimmten Programminformationen ein Schlüsselwort in Synopse sind.
8. Verfahren nach Anspruch 5, wobei die genannte Alarmcharakteristik wenigstens eines der Folgenden umfasst: Alter, Sex, Gewalt, Vulgarität, Diskriminierung und Drogen.
9. Vorrichtung zum Empfehlen von Inhalt, die Folgendes umfasst:
  - ein Informationsempfangsmittel zum Empfangen von Inhaltsinformationen, die eine bestimmte Informationscharakteristik umfassen;
  - ein Vergleichsmittel zum Vergleichen der genannten Inhaltsinformationen mit einem Benutzerprofil, um einen umfassenden Interessensgrad zu erhalten;
  - ein Inhaltsalarmverarbeitungsmittel zum Einholen einer Alarmcharakteristik von der Informationscharakteristik;
  - ein Ermittlungsmittel einer umfassenden Alarmstufe auf der Basis von Parametern der Alarmcharakteristik und Gewichten des umfassenden Interessensgrades anhand der umfassenden Alarmstufe; und
  - ein Filtermittel zum Empfehlen der entsprechenden Informationen dem Benutzer gemäß dem gewichteten umfassenden Interessensgrad.

## 10. Vorrichtung zum Aktualisieren eines Benutzerprofils, die Folgendes umfasst:

ein Benutzerkommunikationsmittel zum Einholen einer Informationscharakteristik für eine Inhaltsinformation und Einholen von Feedbackinformationen über die genannte Inhaltsinformation vom Benutzer;  
 ein Inhaltsalarmverarbeitungsmittel zum Einholen einer Alarmcharakteristik von der Informationscharakteristik, Ermitteln einer umfassenden Alarmstufe auf der Basis von Parametern der Alarmcharakteristik und Gewichten der Feedbackinformation anhand der umfassenden Alarmstufe; und  
 ein Benutzerprofilaktualisierungsmittel zum Aktualisieren des genannten Benutzerprofils gemäß der gewichteten Feedbackinformation.

## Revendications

## 1. Procédé de recommandation de contenu, qui comprend les étapes consistant à :

- a. recevoir des informations sur un contenu, y compris une caractéristique d'information particulière ;
- b. apparier lesdites informations sur un contenu avec un profil d'utilisateur pour obtenir un degré d'intérêt détaillé ; acquérir une caractéristique d'alerte à partir de la caractéristique d'information ;
- déterminer un niveau d'alerte détaillé sur la base de paramètres de la caractéristique d'alerte ;
- pondérer, par le niveau d'alerte détaillé, le degré d'intérêt détaillé;
- d. recommander l'information correspondante à l'utilisateur en fonction du degré d'intérêt détaillé pondéré.

## 2. Procédé selon la revendication 1, selon lequel ladite caractéristique d'information comprend une caractéristique du contenu et une informations particulière au programme.

## 3. Procédé selon la revendication 2, selon lequel l'information particulière au programme est un mot clé dans le synopsis.

## 4. Procédé selon la revendication 1, selon lequel ladite caractéristique d'alerte comprend au moins un des paramètres suivants : âge, sexe, violence, vulgarité, discrimination et drogue.

## 5. Procédé pour actualiser le profil de l'utilisateur, consistant à :

- a. acquérir une caractéristique d'information sur l'information du contenu ;
- b. acquérir des informations de réaction de l'utilisateur sur ladite information du contenu ;
- acquérir une caractéristique d'alerte à partir de la caractéristique d'information ;
- déterminer une caractéristique d'alerte à partir de la caractéristique d'information ;
- déterminer un niveau d'alerte détaillé sur la base de paramètres de la caractéristique d'alerte ;
- pondérer, par le niveau d'alerte détaillé, l'information de réaction ;
- d. actualiser ledit profil en fonction de l'information de réaction pondérée.

## 6. Procédé selon la revendication 5, selon lequel ladite caractéristique d'information comprend une caractéristique du contenu et une information particulière au programme.

## 7. Procédé selon la revendication 6, selon lequel l'information particulière au programme est un mot clé dans le synopsis.

## 8. Procédé selon la revendication 5, selon lequel ladite caractéristique d'alerte comprend au moins un des paramètres suivants : âge, sexe, violence, vulgarité, discrimination et drogue.

## 9. Appareil de recommandation de contenu comprenant :

des moyens de réception d'information pour recevoir une information du contenu qui comprend une caractéristique d'information particulière ;  
 des moyens d'appariement pour apparier ladite information de contenu avec un profil d'utilisateur pour obtenir un degré d'intérêt détaillé ;  
 des moyens de traitement d'alerte-contenu pour l'acquisition d'une caractéristique d'alerte à partir de la caractéristique d'information, la détermination d'un niveau d'alerte détaillé sur la base de paramètres de la caractéristique d'alerte et la pondération, par le niveau d'alerte détaillé, du degré d'intérêt détaillé ; et  
 des moyens de filtrage pour recommander l'information correspondante à l'utilisateur en fonction du degré

d'intérêt détaillé pondéré.

**10.** Appareil d'actualisation du profil d'utilisateur, comprenant :

5 des moyens de communication avec l'utilisateur, pour acquérir la caractéristique d'information d'un élément d'information sur le contenu et obtenir la réaction de l'utilisateur concernant ladite information du contenu.  
des moyens de traitement d'alertes de contenu pour l'acquisition d'une caractéristique d'alerte à partir de la caractéristique d'information, la détermination d'un niveau d'alerte détaillé sur la base de paramètres de la caractéristique d'alerte et la pondération, par le niveau d'alerte détaillé, de l'information de réaction ; et  
10 des moyens d'actualisation du profil de l'utilisateur pour actualiser ledit profil de l'utilisateur en fonction de l'information de réaction pondérée.

15

20

25

30

35

40

45

50

55

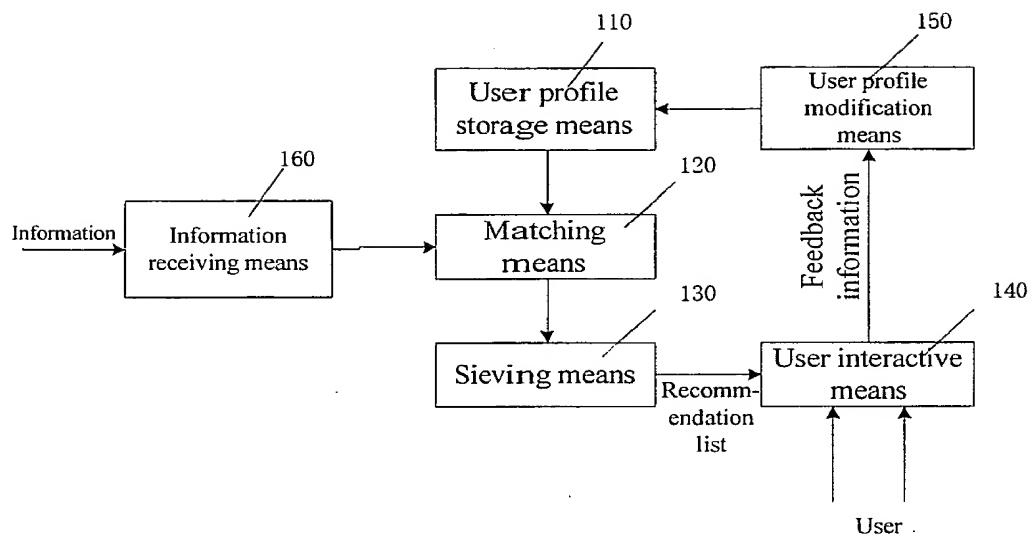


Fig. 1

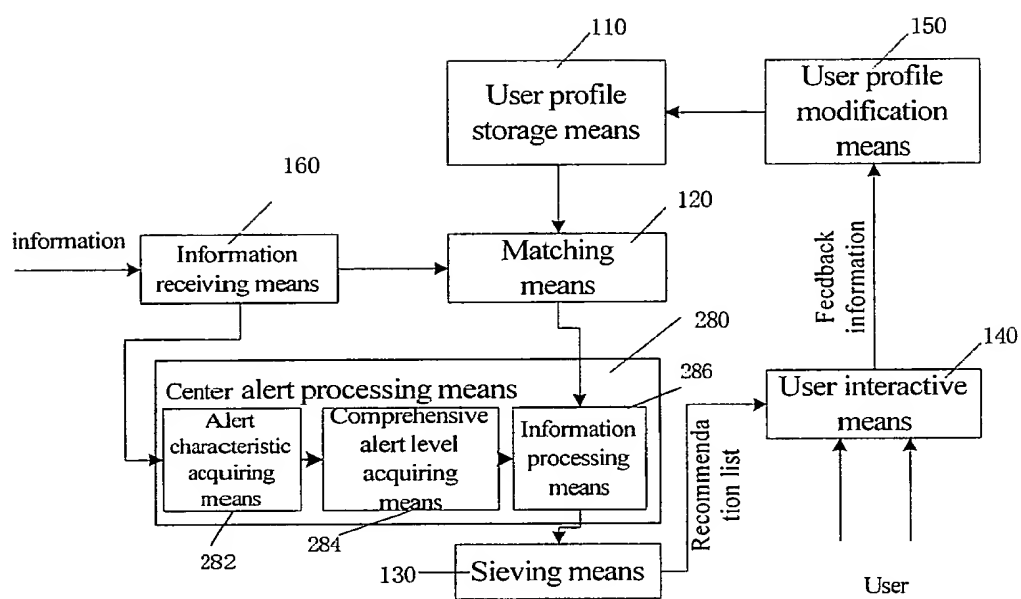


Fig. 2

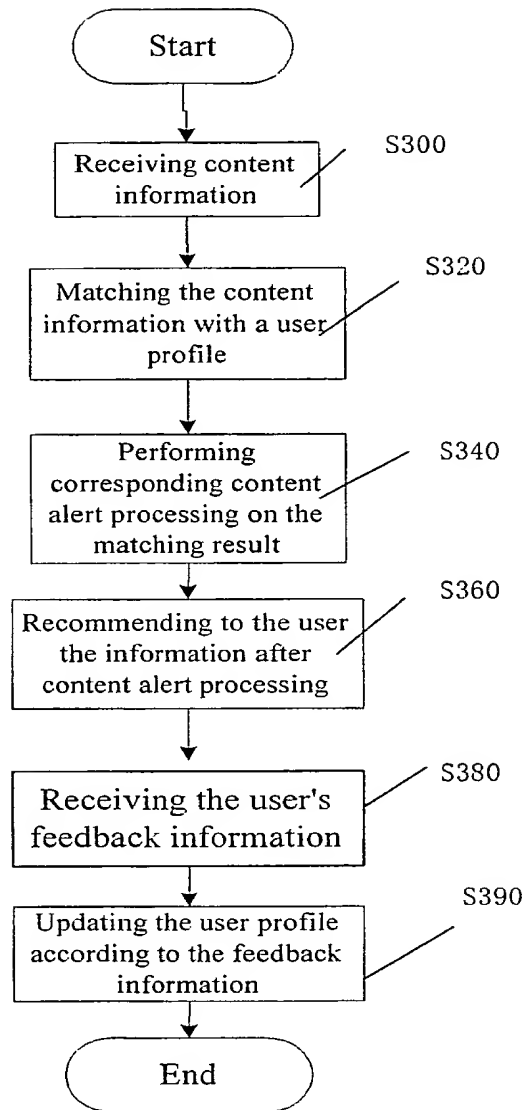


Fig. 3

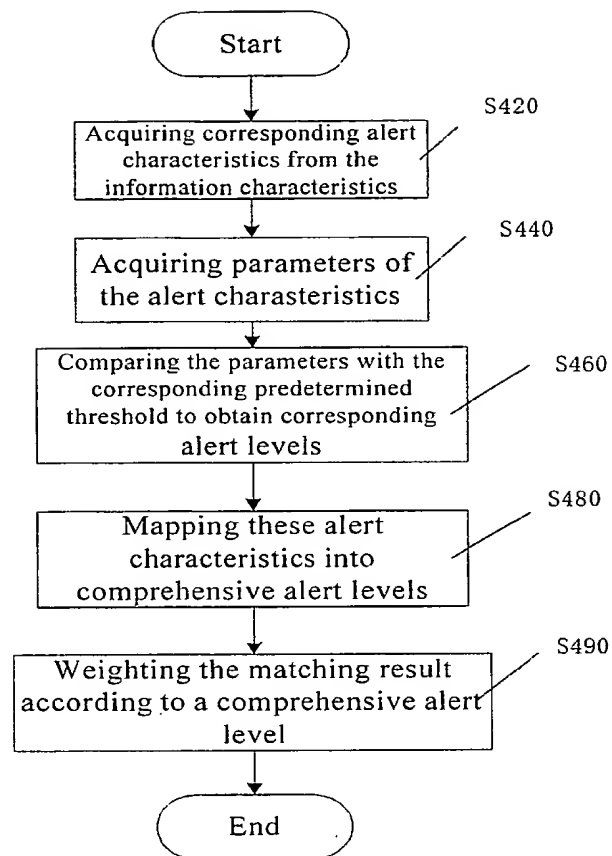


Fig. 4



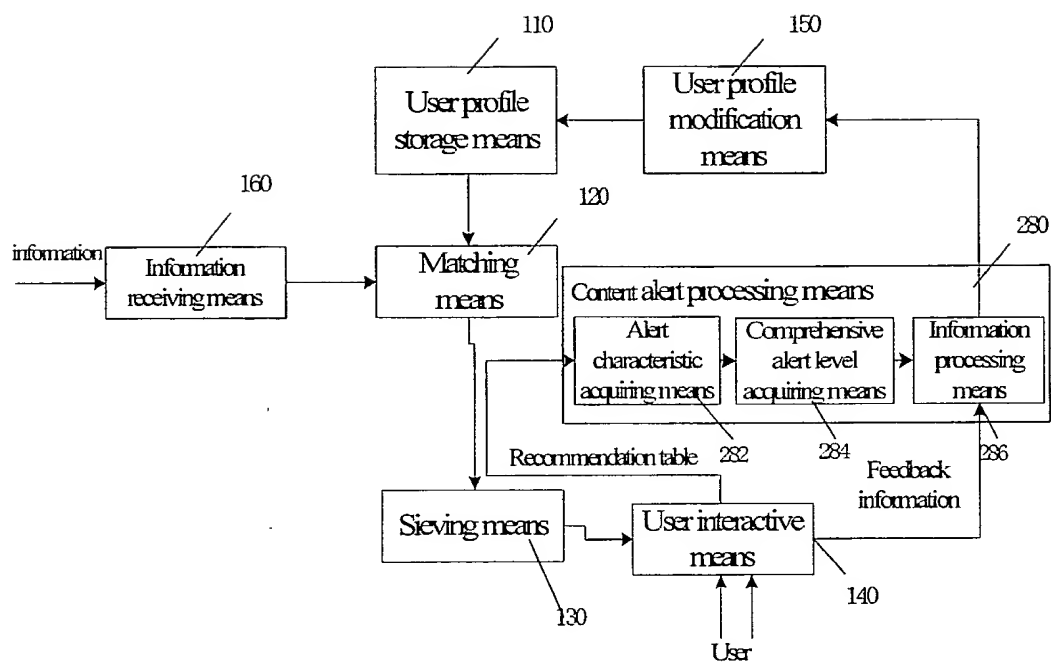


Fig. 5

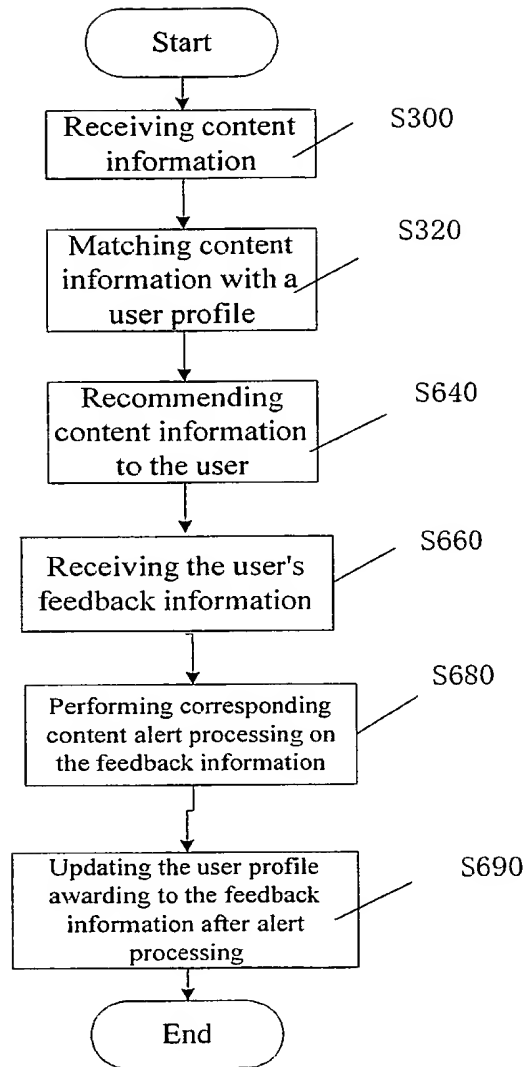


Fig. 6